

(3 Hours)

Note: 1) Question No.1 is compulsory.

Total Marks: 80

2) Attempt any THREE from the remaining.

3) Figures to the right indicate full marks.

- Q.1** A) Find the values of constants a,b,c and d if $f(z) = (x^2 + 2axy + by^2) + i(cx^2 + 2dxy + y^2)$ is analytic 5
- B) Find the Eigen Value of $A^3 - 3A^2$ 5
- Where $A = \begin{bmatrix} 4 & 6 & 6 \\ 1 & 3 & 2 \\ -1 & -4 & -3 \end{bmatrix}$
- C) Find the Laplace Transform of $t \sin at$ 5
- D) Find the Fourier series expansion for $f(x) = x$ defined in $(-1,1)$ 5
- Q.2** A) If $L[f(t)] = \frac{s}{s^2+s+4}$ find $L[e^{-3t}f(2t)]$ 6
- B) Find the Fourier series expansion for $f(x) = x$ defined in $(-\pi, \pi)$ with period 2π 6
- C) Find the analytic function $f(z)$ with the real part $u = x^3 - 3xy^2 + 3x^2 - 3y^2 + 1$ 8
- Q.3** A) Show that the function $u = x^3 - 3xy^2$ is harmonic function. 6
- Hence find the corresponding analytic function and harmonic conjugate.
- B) A string is stretched and fastened to two points distance L apart motion is started by displacing the string in the form $u = \alpha \sin\left(\frac{\pi x}{L}\right)$ from which it is released at time $t = 0$. Show that the displacement of a point at a distance X from one end at time t is given by $u(x,t) = \alpha \sin\left(\frac{\pi x}{L}\right) \cos\left(\frac{\pi ct}{L}\right)$ 6
- C) Obtain the Fourier series expansion of $f(x) = |x|$ where $-\pi \leq x \leq \pi$ 8
- Q.4** A) Find Laplace transform of $e^{-4t} \int_0^t u \sin 3u \, du$ 6
- B) Find Inverse Laplace transform of $\frac{2s+3}{s^2+2s+2}$ 6
- C) Verify Cayley – Hamilton theorem for the matrix A and hence find A^{-1} & A^4 8
- where $A = \begin{bmatrix} 2 & 1 & 1 \\ 0 & 1 & 0 \\ 1 & 1 & 2 \end{bmatrix}$
- Q.5** A) Solve by Crank-Nicholson simplified formula $\frac{\partial^2 u}{\partial x^2} - 16 \frac{\partial u}{\partial t} = 0, 0 \leq x \leq 1$ 6
- subject to the condition $u(0,t) = 0, u(1,t) = 100t, u(x,0) = 0, h = \frac{1}{4}$ for one –time step.
- B) Find the inverse Laplace transform of $\log\left(\frac{s+a}{s+b}\right)$ 6
- C) Show that the matrix $A = \begin{bmatrix} 2 & 2 & 1 \\ 1 & 3 & 1 \\ 1 & 2 & 7 \end{bmatrix}$ is diagonalizable. 8
- Find transforming matrix and diagonal Matrix.
- Q.6** A) Evaluate $\int_0^\infty e^{-3t} t \sin t \, dt$ using Laplace transform. 6
- B) Find the solution $u_t = u_{xx}$ subject to $u(0,t) = 0, u(5,t) = 0, u(x,0) = x^2(25 - x^2)$ using Schmidt method taking $h = 1$ up to 3 seconds. 6
- C) Find the inverse Laplace transform of $\frac{s}{(s^2+1)^2}$ using convolution theorem. 8

Time: 3 Hour

Max. Marks: 80

N. B.

- 1) Question No.1 is compulsory.
- 2) Attempt any three questions from the remaining five questions.
- 3) All questions carry equal marks.

- Q1. Write notes on any FOUR [20]
- (a) Hume-Rothery conditions
 - (b) Cooling curve of pure iron
 - (c) Normalizing
 - (d) Critical Resolved Shear Stress (C.R.S.S.)
 - (e) Nano composites
- Q2. (a) What is plastic deformation? Explain slip mechanism with a neat sketch. [10]
- (b) Define fatigue failure. Discuss fatigue testing. Explain interpretation of S-N curve for ferrous and non-ferrous metals. [10]
- Q3. (a) Classify various types of crystal defects? Discuss any one defect in details. [10]
- (b) Draw the iron-iron carbide equilibrium diagram and write the important transformation seen in the diagram. [10]
- Q4. (a) What is flame hardening process? Discuss advantages, disadvantages and applications of it. [8]
- (b) Discuss the properties of polymer materials. [4]
- (c) Derive an expression for Griffith's theory of brittle materials failure. [8]
- Q5. (a) Draw and explain pack carburizing process. Discuss its applications. [8]
- (b) Explain the processing of ceramics materials through injection moulding operation. [7]
- (c) Define Shape Memory Alloys (SPA). Discuss their properties and applications. [5]
- Q6. (a) Draw and explain Isomorphous and Eutectoid phase diagram. [6]
- (b) Discuss working principle of ultrasonic testing machine with neat sketch. [8]
- (c) Define nanotechnology? Discuss its applications in various fields. [6]

Time: 3 hours

Max. Marks: 80

Note-

1. Question one is compulsory.
2. Solve any three out of remaining five.

- Q.1** Write Short notes with sketch wherever applicable. (Solve any Four) 20
- a Pattern Allowances
 - b Friction welding
 - c Rolling defects
 - d Gear shaping
 - e Industrial revolutions
- Q.2**
- a Explain the desirable properties of molding sands, also explain different types molding sands used in the foundry 10
 - b Classify welding and compare soldering and brazing 10
- Q.3**
- a Describe different types of dies with neat sketches 10
 - b Write short note on column and knee type milling machine 10
- Q.4**
- a What are various methods of taper turning on lathe machine, explain any one type in detail with neat sketch 10
 - b Explain stepwise procedure of powder metallurgy. 10
- Q.5**
- a Describe the investment casting process with neat sketches. 10
 - b Write short note on thermit welding with their advantages, disadvantages applications. 10
- Q.6**
- a Compare the following 10
 1. Shaper and planer
 2. Hot chamber and cold chamber die casting
 - b List various nontraditional machining methods and explain electro-chemical machining in detail 10

3 Hours

Total Marks: 80

- Question-1 is compulsory.
- Answer any three from remaining five questions.
- Assume any suitable data, wherever required, but justify the same. Assumptions made should be clearly stated.
- Illustrate the answers with sketches, wherever required.

I Answer any four of the following:

- a. A brass bar with a cross section area of 1000 mm^2 (area of entire bar) is subjected to axial force (05) as shown in Fig. 1. Determine total elongation of the bar. Take $E = 1.05 \times 10^5 \text{ N/mm}^2$.




Fig.1

- b. A rectangular beam of 200 mm wide and 250 mm deep, is subjected to maximum shear of 50 kN. (05) Determine 1) Average shear stress 2) Maximum shear stress.
- c. Determine the maximum power transmitted by a shaft of 60 mm diameter rotating at 300 rpm, (05) given that maximum permissible shear stress is 80 N/mm^2 .
- d. What are the assumption made in theory of bending. (05)
- e. Differentiate between column and struts. State different end conditions for columns with equation (05)
- f. Differentiate between thick cylinder and thin cylinder. Define hoop stress and Longitudinal Stress. (05)
- II a) T-shaped cross section of a beam is subjected to a vertical shear force of 30 kN as shown in Fig. (10) 2. Determine the shear stress at the neutral axis and at the junction of web and flange. Draw shear distribution for figure no.2. Assume the moment of Inertia about horizontal neutral axis is $29.56 \times 10^6 \text{ mm}^4$




Fig. 2

- II b)** A 10 m long overhanging beam is loaded as shown in Fig. 3. Determine the shear force and bending moment with SFD and BMD diagram at various salient point. (10)

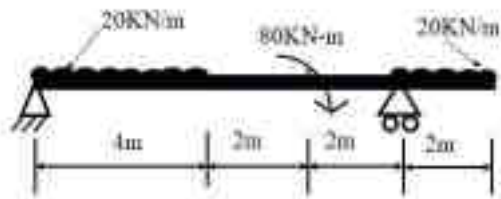


Fig.3

- III a)** A column of timber, with a section of 10 cm x 15 cm and length of 5 m has both ends fixed. (10)
If the Young's modulus for timber = 17.5 kN/mm^2 . Determine, i) Crippling load ii) Safe load for column if factor of safety is 3.
- III b)** A simply supported beam of span 10 m, carries loads as shown in Fig. 4, with a hinge support at A and roller support at B. Determine the slope at the ends and deflection at point D, consider EI is constant. (10)

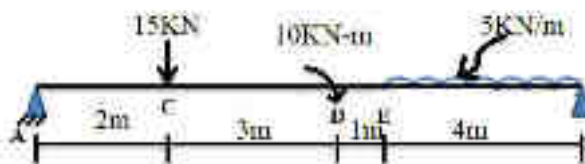


Fig. 4

- IV a)** At a certain point in a strained material, the stresses on the two planes at right angles to each other are 40 N/mm^2 and 20 N/mm^2 respectively (both tensile). They are accompanied by the shear stress of magnitude 20 N/mm^2 . Determine the principal stresses and location of principal planes using Mohr circle and analytical method. (10)
- IV b)** A water main of 90 cm diameter contains water at a pressure head of 110 m. If the weight density of water is 9810 mm^3 , determine the thickness of the metal required for the water main. Given the permissible stress as 22 N/mm^2 . (10)
- V a)** A steel tube of 30 mm external diameter and 25 mm internal diameter encloses a gun metal rod of 20 mm diameter to which it is rigidly joined at each end. The temperature of the whole assembly is 140°C and the nuts on the rod are then screwed lightly on the ends of the tube. Calculate the intensity of stress in the rod when the common temperature has fallen to 30°C . The value of E for steel and gun metal is $2.1 \times 10^5 \text{ N/mm}^2$ and $1 \times 10^5 \text{ N/mm}^2$. The linear co-efficient of expansion for steel and gun metal is $12 \times 10^{-6} \text{ per } ^\circ\text{C}$ and $20 \times 10^{-6} \text{ per } ^\circ\text{C}$. (10)
- V b)** A cast iron bracket, subjected to bending, has a cross-section of an 'I' shape with unequal flanges. (10)
If the compressive stress in top flange is not to exceed 17.5 N/mm^2 , determine bending moment the section can withstand. Take dimensions of I section as: Top flange: $250 \text{ mm} \times 50 \text{ mm}$, web: $50 \text{ mm} \times 250 \text{ mm}$ and bottom flange: $150 \text{ mm} \times 50 \text{ mm}$.
- VI a)** A hollow circular shaft has inside diameter 60% as that of outside diameter. The solid shaft is replaced by a hollow shaft with same power and at the same speed. Determine percentage saving in material, if the same material to be used. (10)
- VI b)** Determine the instantaneous stress produced in a bar with a cross-sectional area of 10 cm^2 and a length of 4 m by the sudden application of the tensile load of unknown magnitude. Extension of the bar due to suddenly applied load is 1.35 mm. Also determine the magnitude of suddenly applied load. Take $E = 2 \times 10^5 \text{ N/mm}^2$. (10)

Duration: 3hrs

Marks:80

- N.B: (1) Question No 1 is Compulsory.
(2) Attempt any three questions out of the remaining five.
(3) All questions carry equal marks.
(4) Assume suitable data, if required and state it clearly.
(5) Use Steam Table.

- 1 Attempt any Five [20]
- a) Define a thermodynamic system. Distinguish between open and closed systems with examples.
 - b) Define Thermal Reservoir. Difference between Heat Engine, Heat pump, Refrigerator Drive the COP of heat pump is greater than one
 - c) Define Joule Thomson coefficient and state its significance
 - d) Prove that Entropy is property of the system
 - e) Define a) Mach number b) Stagnation temperature c) Stagnation Pressure d) Sonic flow.
 - f) A gas undergoes a reversible non-flow process according to the relation $p = (-3v + 15)$ where V is the volume in m^3 and p is the pressure in bar. Determine work done when the volume changes from 3 to 6 m^3 .
- 2 a) Write two major statements of second law of thermodynamics and explain how the concept of thermal efficiency and coefficient of performance are generated by this law. [08]
- b) 2 kg of an ideal gas occupies a volume of 0.3 m^3 at 10 bar pressure and 500K temperature when this gas expands polytropically $PV^{1.2} = C$ the internal energy decreases by 300KJ. and $\gamma = 1.4$ Determine a) Specific gas constant b) Final temperature, pressure and volume c) Heat and work interaction across the system boundary. [12]
- 3 a) What do you mean by availability? A system at 450 K receives 225 kJ/s of heat energy from a source at 1500K, and the temperature of both the system and source remain constant during the heat transfer process. Determine net change in entropy, available energy of heat sources and system, and decrease in available energy Take atmospheric temperature equal to 300 K. [10]

- b) Explain various components of a simple steam power plant with sketch. [06]
- c) Define and explain the terms Available energy, Un-available energy, irreversibility and Dead state. [04]
- 4 a) Sketch and explain the Rankine cycle on p-v and T-s plots. [08]
- b) Define a) wet steam b) Superheated steam c) Dryness fraction d) Saturation temperature. Steam initially at 0.95 dry and 12 bar expands isentropic ally in a non-flow process in a final dryness fraction of 0.8. What is the final pressure of steam and enthalpy change during the process? [12]
- 5 a) In a thermal power plant operating on an ideal Rankine cycle, superheated steam produced at 5MPa and 500°C is fed to a turbine where it expands to the condenser pressure of 10kPa. If the net power output of the plant is to be 20MW, evaluate: [12]
- i) Heat added in the boiler in kJ/k ii) The thermal efficiency.
iii) The mass flow rate of steam in kg/sec
- b) What is cut off ratio? What are assumptions of air standard cycle? [08]
- For same compression ratio and heat supplied, compare Otto and Diesel cycle with the help of P-V and T-S Diagram.
- 6 a) An oil engine takes in air at 1.01 bar, 20°C and the maximum cycle pressure is 69 bar. The compression ratio is 18. Calculate the air standard thermal efficiency based on the dual combustion cycle. Assume that the heat added at constant volume is equal to the heat added at constant pressure. [12]
- b) Explain the effect of variation in back pressure on C-D nozzle performance [08]
