

Sub:- IC
(3 Hours)

[Total Marks : 80]

- NB.: (1) Question no.1 is compulsory.
(2) Solve any three questions from the remaining five.
(3) Figures to the right indicate full marks.
(4) Assume suitable data if required and mention the same in the answer sheet.

1. Solve any five. 20
- (a) Draw the diagram for grounded load voltage to current converter and derive the expression for the output current.
 - (b) Explain simple current limit protection circuit in voltage regulators.
 - (c) Compare ideal and practical opAmp.
 - (d) How LM317 is used as adjustable voltage regulator.
 - (e) Explain working of peak detector.
 - (f) Draw mod-10 counter using IC7493.
2. (a) Draw the diagram of a monostable multivibrator using timer IC555. With the help of waveforms at the trigger input across the charging capacitor and at the output explain its working. Design the same for pulse width of 1ms. 10
- (b) Draw the functional block diagram of IC723 Voltage regulator and Explain its working as a basic low voltage regulator. Design the same for an output of 5V and load current upto 200mA. 10
3. (a) Explain working of RC phase shift Oscillator with the help of neat circuit diagram and derive expression for frequency of oscillation. 10
- (b) With the help of a neat diagram, input and output waveforms and voltage transfer characteristics explain the working of non inverting schmitt trigger. Derive the expressions for the upper and lower threshold levels. Explain how these levels can be varied. 10
4. (a) With the help of neat circuit diagrams explain the working of universal shift register IC74194 as a ring counter and twisted ring counter. 10
- (b) With the help of neat diagram explain working of IC74163 synchronous 4-bit binary counter. Also illustrate cascading connections for IC74163 based counter. 10

TURN OVER

5. (a) What is precision rectifier? Explain working of full wave precision rectifier with the help of neat diagram and waveforms. 10
(b) Draw circuit diagram of antilog converter and derive expression for its output voltage. 10
6. Write Short notes on any four. 20
(a) Window detector
(b) Programmable gain amplifier.
(c) IC 534 multiplier
(d) iC74181 Arithmetic Logic Unit.
(e) Monolithic Switching Regulator.



MUPD16445 SCO445 12/19/2016 1:43:15 PM MUPD16445 SCO445 12/19/2016 1:43:15 PM MUPD16445 SCO445 12/19/2016 1:43:15 PM

TE ERTC sem V CBGS AC 13/12/2016

PE SEM-V ERTC CBGS

Sub:- AC

Q.P. Code : 588102

(3 Hours)

[Total Marks : 80

- N.B. :** (1) Question No.1 is compulsory.
(2) Attempt any three questions out of remaining five.
(3) **Figures** to the right indicate full marks.
(4) Assume suitable data if required and mention the same in answer sheet.

1. Solve any four :-

- (a) Justify why FM is more immune to noise.
(b) Define noise factor and noise figure.
(c) What is Pre-emphasis? Why is it used? Sketch and explain pre-emphasis circuit.
(d) What is quantization? Explain types of quantization.
(e) Why AGC is required in receivers? Differentiate between simple AGC and Delayed AGC.

2. (a) With neat block diagram explain filter method of SSB generation. State its drawbacks. 10

(b) Explain practical diode detector with delayed AGC. 10

3. (a) The antenna current of AM broadcast transmitter modulated to the depth of 40% by an audio sine wave is 11 Ampere. It increases to 12 Ampere as a result of simultaneous modulation by another audio sine wave. What is the modulation index due to this second wave? 10

(b) Derive mathematical expression for FM wave and its modulation index. 10

4. (a) Explain the operation of Foster seely discriminator with the help of circuit diagram and phasor diagram. 10

(b) In a broadcast superhetrodyne receiver having no RF amplifier, the loaded Q of the antenna coupling circuit (at the input to the mixer) is 100. 10

(i) If the intermediate frequency is 455kHz, calculate the image frequency and its rejection at 1000kHz and at 25MHz.

(ii) In order to make the image frequency rejection of the receiver as good at 25MHz as it was at 1000kHz, calculate the loaded Q which an RF amplifier for this receiver would have.

TURN OVER

Q.P. Code : 588102

2

5. (a) State and prove sampling theorem for low pass band limited signal. 10
(b) With the help of block diagram and waveform explain generation and detection of Pulse Width Modulation. 10
6. Write short notes on any four of the following :- 20
(a) ISB Receiver.
(b) Aliasing error and Aperture effect.
(c) Slope overload distortion and granular noise.
(d) Frequency Division Multiplexing (FDM).
(e) Noise in communication system.



MUPD16445 SCO445 12/13/2016 1:36:58 PM MUPD16445 SCO445 12/13/2016 1:36:58 PM MUPD16445 SCO445 12/13/2016 1:36:58 PM

16445 s

- N. B.: (1) Question No. 1 is compulsory.
 (2) Attempt any four questions from remaining five questions.
 (3) Assume suitable data if necessary.
 (4) Figures to the right indicate full marks.

1. (a) State and prove convolution property of Laplace transform. 20
 (b) Check whether the following signal is energy or power signal

$$x(n) = \left(-\frac{1}{2}\right)^n u(n)$$

 (c) Derive the relationship between Z-transform, DTFT and DFT.
 (d) Check the following system for linearity and time invariance

$$y(t) = t^2 x(t) + 3$$

2. (a) Obtain inverse Z-transform for all possible ROC conditions 10


$$H(z) = \frac{3(z^2 + 6z + 8)}{(z - 1/2)(z - 2)(z - 4)}$$

- (b) A continuous time system is described by the following differential equation 10

$$\frac{d^2 y(t)}{dt^2} + 6 \frac{dy(t)}{dt} + 8y(t) = \frac{5dx(t)}{dt} + 3x(t)$$

 (i) Determine transfer function.
 (ii) Obtain impulse response.
 (iii) Obtain response of the system for input $x(t) = t$.

3. (a) Obtain even and odd parts of the following signal 06

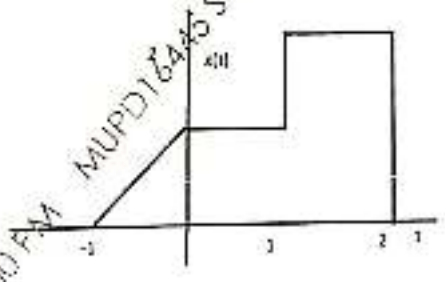

- (b) Derive the relation to find transfer function model from state space 06
 (c) Perform convolution of following signals using graphical method 08
 $x(t) = u(t)$ and $h(t) = e^{-3t} u(t)$

- (a) Obtain linear convolution of following signals 05
 $x(n) = -2\delta(n + 3) - 3\delta(n + 2) + \delta(n) + 3\delta(n - 1)$ and
 $h(n) = -3\delta(n + 2) + 6\delta(n + 1) + 2\delta(n - 1) + 5\delta(n - 2)$

[TURN OVER]

(b) A discrete time system is described by following difference equation
 $y(n) - 7y(n-1) + 12y(n-2) = x(n-1) + 2x(n)$
 $y(-1) = -1$ and $y(-2) = 1$

Determine (i) zero input response
(ii) zero state response for the input $x(n) = (1/2)^n u(n)$
(iii) Total response of the system.



(c) State and prove properties of Z-transform.

5. (a) Obtain convolution of $x_1(n) = [3, -1, 2, -3]$ and $x_2(n) = [-2, 4, -2, 1]$

(b) Using Laplace transform and inverse Laplace transform, find convolution of following signals
 $x(t) = 2e^{-3t}u(t)$ and $h(t) = 3e^{-2t}u(t) + 2e^{4t}u(t)$

(c) Write a short note on sampling theorem.

6. (a) State and prove properties of Fourier transform.

(b) Prove that the power of energy signal is infinity.

(c) Find the relation between Laplace transform, Z transform and Fourier transform.

(d) Determine whether the following signals are periodic or not

- (i) $x(n) = 5 \sin(\sqrt{2}\pi n)$
- (ii) $x(t) = \cos(2t) + \sin(2\pi t)$

7. (a) Explain recursive and nonrecursive systems with examples

(b) State and prove properties of Laplace transform.

(c) Realize the following transfer function using Direct form -I, II, parallel and Cascade forms

$$X(z) = \frac{2z^2 + 1}{z^3 - 6z^2 + 11z - 6}$$

MUPD16445 SCO445 12/13/2016 1:38:50 PM

MUPD16445 SCO445 12/13/2016 1:38:50 PM

(3 Hours)

[Total Marks 80]

- N.B.**
- 1) Question No.1 is Compulsory.
 - 2) Solve any three questions from the remaining.
 - 3) Assume suitable data wherever necessary and justify the assumption.
 - 4) Draw suitable diagrams wherever required.

1. a) Compare Binomial filter and chebyshev filter. 05
b) Compare Broadside and Endfire array. 05
c) find the gain of an Antenna when physical aperture is 5m^2 at 2GHz with efficiency 70%. 05
d) Compare monopole, Dipole and folded dipole antenna. 05
2. a) Design a composit high pass filter by image parameter method with the following specification. 10
 $R_s = 75 \Omega$, $f_c = 50 \text{ MHz}$, $f_u = 48 \text{ MHz}$.
b) Derive radiation resistance of small dipole. Explain its significance. 10
3. a) Derive Friss transmission formula state its significance in wireless communication. 10
What is maximum power received at a distance of 0.75 km over free space for 1GHz frequency.
The system consist of transmitting antenne with 3dB gain and receiving antenna with 17dB gain
and antenna is fed with 200 W power.
b) Explain the structure and functioning of Yagi Uda antenna. 10
4. a) Find the radiation pattern for an array of 4 elements fed with same amplitude and opposite phase. Find its HPBW and BWFN. 10
b) Draw the structure of microstrip antenna. Discuss its characteristics, limitations and applications. 10
5. a) Describe parabolic reflector antenna and its different feeding methods. 10
b) Explain important features of loop antenna. Discuss use of loop antenna in radio direction finding. 10
6. Write short notes on : 20
 - a) RF field effect transistor
 - b) Binomial array
 - c) RF behavior of capacitor and inductor
 - d) Helical antenna





Q.P. Code : 586400

(3 Hours)

[Total Marks : 100

- N.B. : (1) Question No.1 is compulsory
(2) Answer any four out of remaining six questions
(3) Assume suitable data wherever required but justify the same.

1. (a) Draw and explain lumped element circuit model for a transmission line. 5
(b) What is compressed smith chart. List applications of smith chart. 5
(c) How Richards transform is useful in filter design. 5
(d) Explain physical properties of semiconductor. 5
2. (a) Explain with equivalent circuit the radio frequency behavior of Resistor, inductor and capacitor. 10
(b) What is surface mounted devices (SMDs). Write note on chip components. 10
3. (a) If $Z_L = 50 - j100 \Omega$ and characteristic impedance $Z_0 = 50 \Omega$, find 10
(i) Input impedance at $d = 0.15 \lambda$
(ii) Input reflection coefficient and
(iii) Voltage standing wave ratio
(b) Design a Butterworth low pass filter having a cut-off frequency of 250 MHz and attenuation of 15 dB at 300 MHz. 10
4. (a) Show the RF small signal model of BJT and equivalent model using Miller effect. Find the value of C_{m1} and C_{m2} in terms of C_{cb} , V_{be} , V_{cc} . 10
(b) Explain schottky contact with cross sectional view and circuit model. 10
5. (a) Derive expression for internal, external and loaded quality factor for standard series and parallel resonant circuit. 10
(b) An abrupt p-n junction made of silicon has the acceptor and donor concentration of $N_A = 10^{18} \text{ cm}^{-3}$ and $N_D = 5 \times 10^{15} \text{ cm}^{-3}$ respectively. Assuming that the device is at room temperature. 10
(i) barrier voltage
(ii) the space charge width in p and n type semiconductors.

TURN OVER



Q.P. Code : 586400

2

6. (a) Explain in brief the principle operation of HEMT and MESFET along with their construction 10
(b) State and prove any two kuroda's identities. 10
7. Write short note on 20
(a) Microstrip transmission line
(b) Insertion loss and Return loss
(c) Butterworth filter



MUPD16445 SCO445 12/3/2016 1:56:41 PM MUPD16445 SCO445 12/3/2016 1:56:41 PM

TE SEM-IV EXTC (CBGS) NOV-DEC-2016

Sub - MCA

MCA/EXTC/TE SEM IV/CBGS

28/11/16

Q.P. Code : 587900

(3 Hours)

[Total Marks : 80

- N. B.: (1) Question No. 1 is compulsory.
(2) Solve any three from remaining five questions.
(3) Figures to the right indicate full marks.
(4) Assume suitable data if necessary and mention the same in the answersheet.

Q1

- a Differentiate between microprocessor and microcontroller.
b Explain 8051 assembler directives.
c Short Note: CPSR.
d List and explain design metrics of an Embedded System.

5
5
5
5

Q2

- a Explain PORT 1 structure of 8051.
b Design a microcontroller system using 8051 microcontroller, 8kB EPROM & 8kB RAM.

10
10

Q3

- a WAP for 8051 microcontroller to generate a square waveform of frequency 1kHz and 50% duty cycle at pin P1.1. Assume 8051 is operating at frequency 12MHz.
b Interface 8051 with DAC 0808, WAP to generate a triangular waveform.

10
10

Q4

- a Draw and explain data flow model of ARM7.
b Explain register organization of ARM7.

10
10

Q5

- a Explain ARM following instructions:
CMP r0, r1, LSR#7 ADD r2, r1, r0 LDR r10, [r1]
AND r1, r1, #3 OR r2, r2, #3
b Explain digital camera as an example of embedded system.

10
10

Q6 Short Notes:

- a Interrupt structure of 8051.
b Timer modes 8051.

10
10



PE SEM - IV (Old) EATC NOV-DEC-2016

EXTD/V/OLD
MCM-I 28/11/16

Sub - MCM

Q.P. Code : 586301

(3 Hours)

[Total Marks : 100

- N.B. : (1) Question No.1 is Compulsory.
 (2) Solve any four questions from the remaining six questions.
 (3) Figures to the right indicate full marks.
 (4) Assume suitable data where necessary.

- | | | |
|----|--|----|
| 1. | (a) Explain the need of multiplexing ADO-AD7 of 8085 microprocessor | 5 |
| | (b) Explain PSW of 8051. | 5 |
| | (c) Write difference between microcontroller & microprocessor. | 5 |
| | (d) Explain T state, machine cycle & instruction cycle. | 5 |
| 2. | (a) Interface 16Kb RAM using 8K x 8 devices and 16Kb EPROM using 8K x 8 devices with 8085 microcomputer system. | 10 |
| | (b) Write assembly language program to add two 16 bit numbers for 8085 based microcomputer. | 10 |
| 3. | (a) Explain memory organisation of 8051. | 10 |
| | (b) Explain timer modes of 8051. | 10 |
| 4. | (a) Explain internal structure of Port 1 and Port 3 of 8051. | 10 |
| | (b) Draw and explain interrupt structure of 8085 microprocessor. | 10 |
| 5. | (a) Write assembly language program for microcontroller 8051 to generate a square wave of 1KHz on P 1.1. Assume crystal frequency of 12 MHZ. | 10 |
| | (b) Draw and explain architecture of 8085 microprocessor. | 10 |
| 6. | (a) Draw and explain handshake modes of 8255. | 10 |
| | (b) Interface stepper motor with 8051 and write assembly language program for the same. | 10 |
| 7. | (a) Write assembly language program for 8085 to transfer data block of 10 bytes from memory location 3000H to location 4000H. | 10 |
| | (b) Explain the instructions of 8051. | 10 |
| | (i) MULAB | |
| | (ii) MOV A,Rn | |
| | (iii) DJNZ Rn, addr | |
| | (iv) ORL A, #data | |
| | (v) SETB C | |





110 Pgs.

Total Marks: 80

Q.3.

- (1) Question No. 1 is Compulsory
- (2) attempt any three questions from the remaining Five questions
- (3) Assume suitable data if necessary.

- (1) (a) Explain any two properties of an estimator's length. 75
- (b) State and explain Chebyshev's inequality. 75
- (c) State Central Limit Theorem and give its significance. 75
- (d) State and explain Bayes theorem. 75
- (2) (a) A two dimensional Random variable has the following pdf. 10

$$f_{XY}(x, y) = kxye^{-(x^2+y^2)} \quad x > 0, y > 0$$

- Find
- (i) Value of constant k.
 - (ii) Marginal density of X and Y.
 - (iii) Conditional densities of X and Y.
 - (iv) Check for independence of X and Y.



- (b) In a communication system, a zero is transmitted with probability 0.5 and a one is transmitted with probability 0.5. If a noise in the channel, a zero is received as one with probability 0.2. Similarly, a one is received as zero with probability 0.4. Now,
 - (i) What is the probability that a one is received?
 - (ii) It is observed that a one is received. What is the probability that zero was transmitted?
 - (iii) What is the probability that an error is committed?

- (2) (b) If the joint pdf of (X, Y) is given as. 10

$$f_{XY}(x, y) = e^{-(x+y)} \quad x > 0, y > 0$$

- Find the probability density function of (U, V) , where $U = \frac{X}{X+Y}$ and $V = X+Y$.
 Are U and V independent?

- (3) Define Moment Generating function of a Random variable. If X is a RV discrete or Continuous, then show that its nth raw moment is given as.

$$E(X^n) = \frac{d^n M_X(t)}{dt^n} \text{ at } t=0.$$

[Turn Over



Q.P. Code : 587802

-2-

- Q4. (a) Let X_1, X_2, X_3, \dots be sequence of Random variables. Define (i) Convergence almost everywhere (ii) Convergence in probability (iii) Convergence in distribution (iv) Convergence in mean square sense for the above sequence of Random variable X . 10

- (b) Prove that if input to an LTI system is WSS process, then its output is also a WSS process. 10

- Q5. (a) A Random process is given by $X(t) = A \cos(\omega t + \theta)$, where A and ω are constants and θ is a Random variable that is Uniformly distributed in the interval $(0, 2\pi)$. Show that $X(t)$ is a WSS process and it is Correlation ergodic. 10

- (b) Explain Power spectral density and prove any two of its properties. The power spectrum of a WSS process is given by. 10

$$S(\omega) = \frac{10\omega^2 + 25}{(\omega^2 + 4)(\omega^2 + 9)}$$

Find its autocorrelation function:

- Q6. (a) State and prove Chapman-Kolmogorov equation. 10
- (b) The transition probability matrix of a Markov chain $\{X_n\}_{n=1,2,\dots}$, having three states 1, 2 and 3 is, 10

$$P = \begin{matrix} & \begin{matrix} 1 & 2 & 3 \end{matrix} \\ \begin{matrix} 1 \\ 2 \\ 3 \end{matrix} & \begin{bmatrix} 0.4 & 0.5 & 0.4 \\ 0.6 & 0.2 & 0.2 \\ 0.3 & 0.4 & 0.3 \end{bmatrix} \end{matrix}$$

The initial probability distribution is $p^{(0)} = (0.7, 0.2, 0.1)$

Find (i) $P(X_2 = 3)$

(ii) $P(X_3 = 2, X_2 = 3, X_1 = 3, X_0 = 2)$

-----END-----

PE SEM-V RSA (OLD)

EXTC

22/11/16

NOV - DEC - 2016



QP Code : 79996

(3 Hours)

[Total Marks : 100

- N.B. : (1) Question No.1 is compulsory.
(2) Solve any four from the remaining six questions.
(3) Assume suitable data wherever necessary.

- 1 (a) State and explain the three axioms of probability. 5
(b) Define random Variable and random process. 5
(c) Write two characteristics of the Normal distribution. 5
(d) When is a stochastic process said to be ergodic? 5
2. (a) Define probability distribution function of random variable. State important properties of it and prove. 10
(b) Suppose $f_X(x) = 2x/\pi^2$, $0 < x < \pi$, and $Y = \sin X$. Determine $f_Y(y)$. 10
3. (a) Suppose X and Y are two random variables. Define covariance and correlation coefficient of X and Y. When do we say that X and Y are
(i) orthogonal
(ii) independent and
(iii) uncorrelated? Are uncorrelated random variables independent? 10
(b) A stationary process is given by $X_c(t) = 10 \cos [100t + \Theta]$ where Θ is a random variable with uniform probability distribution in the interval $[-\pi, \pi]$. Show that it is a wide sense stationary process. 10
4. (a) State and prove Bayes Theorem. 10
(b) Obtain the Mean and Autocorrelation of the output process Y (t) if WSS input is applied to LTI systems. 10
5. (a) Explain Power Spectral Density. State its important properties and prove any one property. 10
(b) State and prove Chapman-kolmogorov equation. 10
6. (a) A random variable has the following exponential probability density function $f_X(x) = Ke^{-Kx}$. Determine the value of K and corresponding distribution function. 10

[TURN OVER

SN-Con. 6851-16.

QP Code : 79996

2

b) Three boys A, B and C are throwing a ball to each other. A always throws the ball to B and B always throws the ball to C, but C is just as likely to throw the ball to B as to A. Show that the process is Markovian. Find the transition matrix and classify the states. 10

7) Write short notes on

- a) Central limit theorem.
- b) Moment generating function.
- c) Ergodic process.
- d) Sequence of random variable.



SN-Con. 6851-16.